



EUROFLAM EI60 (single and double leaf)

TIMBER FIRE-RATED DOORSETS

DOOR LEAF

- Huet solid timber core.
- Thickness: 51mm hardwood stiles all round

DOOR FRAME

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Extension linings available
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

CHOICE OF DOOR FACINGS

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

IRONMONGERY

- 3 or 4 lift-off hinges - 160 x 70mm black or chrome-plated
- Cut-outs/mortices are available to suit a variety of locks and handles
- Cut-outs/mortices are available to suit a large choice of electromagnetic lock
- Spy hole
- Concealed door closer available: DORMA ITS96
- Electric striking plate (available on single leaf)
- Factory fitted Emergency exit locks:
 - Vachette D45 emergency exit device
 - Emergency exit push bar selection
- Doors can be held in open position using electro-magnetic device. In the event of a fire, doors will assume closed position

PERIMETER SEALS

- Intumescent seals factory fitted (within the frame or leaf)
- Combined smoke and acoustic seals fitted within the frame and leaf (tested to meet acoustic performance: Rw 35dB single leaf/Rw 34dB double leaf)




EI60 (FD60)
(EITHER SIDE - EFFECTIS 13-A-683 - EFFECTIS 13-A-871)




35dB as single leaf **34dB** as double leaf




Smoke Seal (S_s Classification)
(EN 13501-2/BS EN 1634-3)




400x300




Ø360




1200x200




1200x300




1200x400



750x200



750x200
700x200




750x200
500x200



EUROFLAM EI60 (single and double leaf)

TIMBER FIRE-RATED DOORSETS

All sizes are in mm

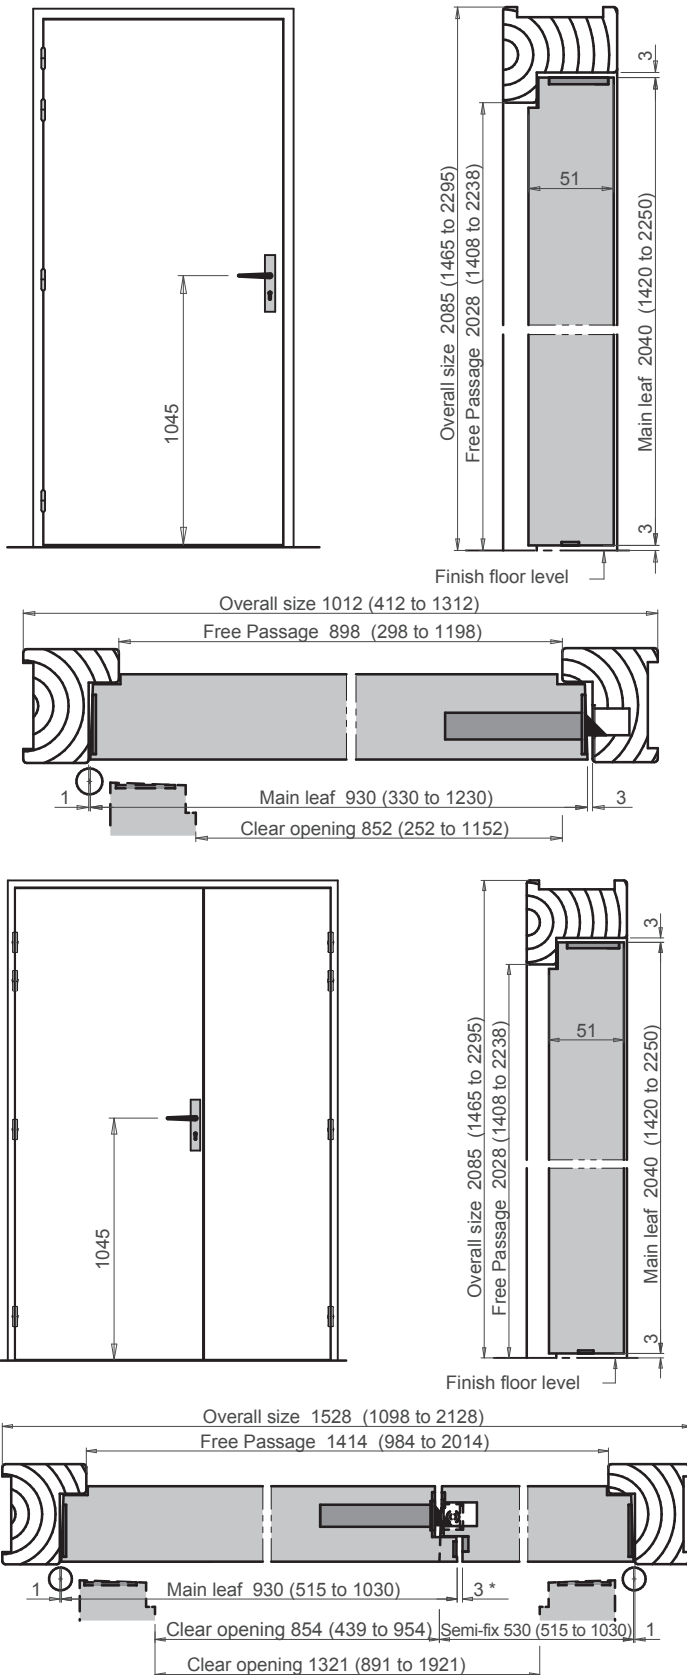

Meeting stiles available

